


KVM1100/15

4 kutuplu 1500 rpm-50Hz
4 poles 1500 rpm-50Hz

Kem-P VIBRATION MOTORS

Gövde Ölçüleri - Overall Dimensions (mm)

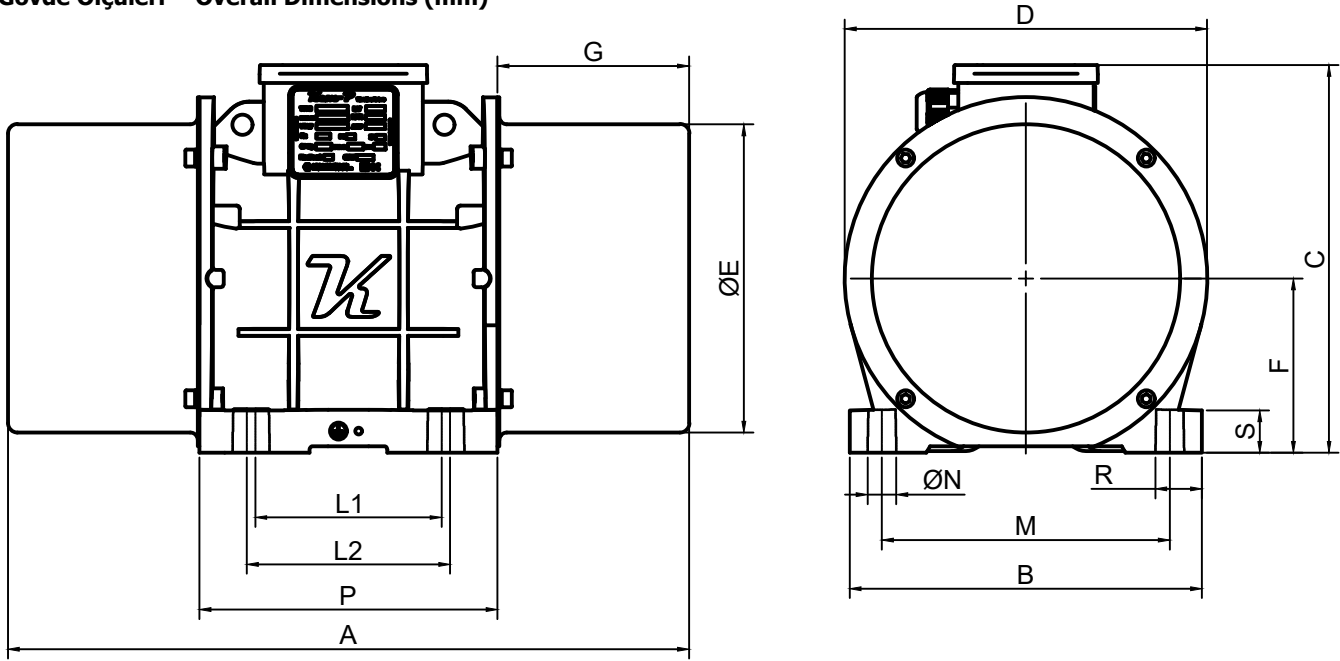

GENEL BOYUTLAR/OVERALL DIMENSIONS (mm)

A	B	C	D	E	F	G	L	Holes Number	M	ØN	P	R	S
399	208	229	214	182	106	111.5	110-120	4	170	16	176	45	28

TEKNİK VERİLER / TECHNICAL DRAWINGS

Santrifüj Kuvveti Centrifugal Force (Kgf / KN)	(*) Statik Moment Statical Moment (kgmm)	Devir Rpm	Ağırlık Weight (kg)
1110 Kgf/10.88KN	441.7	1500	33

(*) Working moment = 2x static moment

Giriş Gücü Input Power (kW)	Giriş Voltajı Input Voltage (V)	Giriş Akımı Input Current (A)	Faz Phase	Verim Efficiency	Başlangıç Akımı Starting Current (A)
0.66	400	1.33	3	0.76	4.7

Montaj deliği Holes number	Çalışma Aralığı Serv.	Koruma Sınıfı Safety Class	Ortam Sıcaklığı Ambient Temperature
4	S1	F	40°C

Sertifikasyon
Certification



II 2D Ext b III B T 120° C Db - IP 66

TARİH : 21.04.2026