
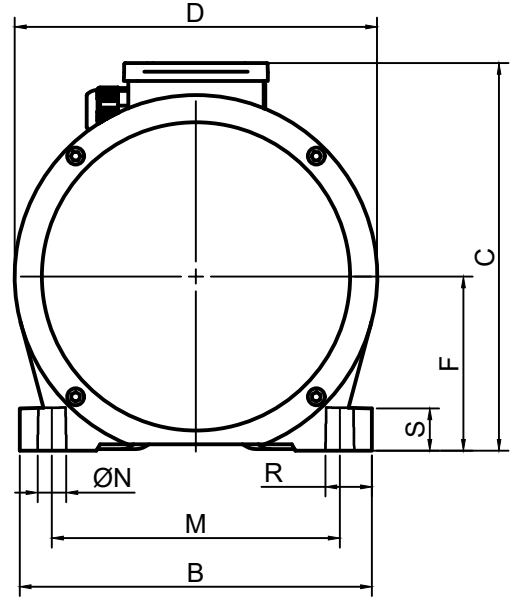


# KVM1300/3

2 kutuplu 3000 rpm-50Hz  
2 poles 3000 rpm-50Hz

**Kem-P** VIBRATION MOTORS

## Gövde Ölçüleri - Overall Dimensions (mm)

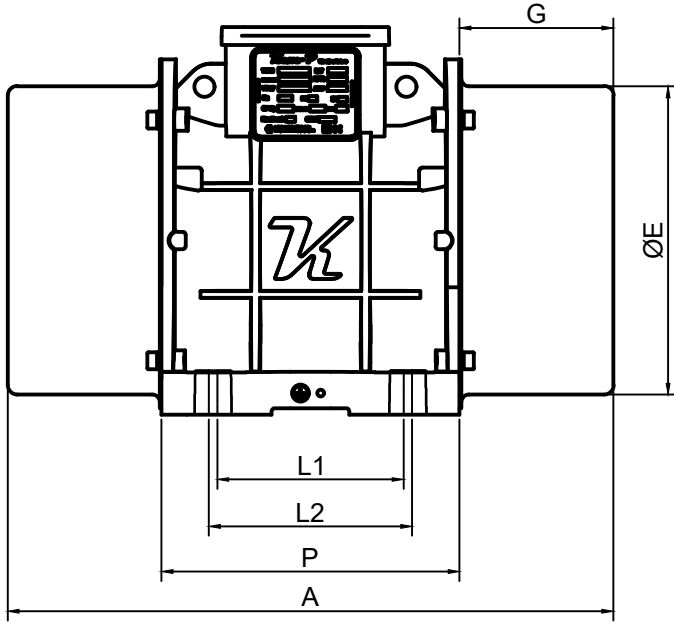

### GENEL BOYUTLAR/OVERALL DIMENSIONS (mm)

| A   | B   | C   | D   | E   | F   | G  | L       | Holes Number | M   | ØN | P   | R  | S  |
|-----|-----|-----|-----|-----|-----|----|---------|--------------|-----|----|-----|----|----|
| 358 | 208 | 229 | 214 | 182 | 106 | 91 | 110-120 | 4            | 170 | 16 | 176 | 45 | 28 |

### TEKNİK VERİLER / TECHNICAL DRAWINGS

| Santrifüj Kuvveti<br>Centrifugal Force<br>(Kgf / KN) | (*) Statik Moment<br>Statical Moment<br>(kgmm) | Devir<br>Rpm | Ağırlık<br>Weight<br>(kg) |
|------------------------------------------------------|------------------------------------------------|--------------|---------------------------|
| 1352 Kgf/13.25KN                                     | 134,5                                          | 3000         | 24.5                      |

(\*) Working moment = 2x static moment

| Giriş Gücü<br>Input Power<br>(kW) | Giriş Voltajı<br>Input Voltage<br>(V) | Giriş Akımı<br>Input Current<br>(A) | Faz<br>Phase | Verim<br>Efficiency | Başlangıç Akımı<br>Starting Current<br>(A) |
|-----------------------------------|---------------------------------------|-------------------------------------|--------------|---------------------|--------------------------------------------|
| 1.2                               | 400                                   | 2.5                                 | 3            | 0.70                | 11.5                                       |

| Montaj deliği<br>Holes number | Çalışma Aralığı<br>Serv. | Koruma Sınıfı<br>Safety Class | Ortam Sıcaklığı<br>Ambient Temperature |
|-------------------------------|--------------------------|-------------------------------|----------------------------------------|
| 4                             | S1                       | F                             | 40°C                                   |

Sertifikasyon  
Certification



II 2D Ext b III B T 120° C Db - IP 66

TARİH : 21.04.2026