


KVM2000/15

4 kutuplu 1500 rpm-50Hz
4 poles 1500 rpm-50Hz

Kem-P VIBRATION MOTORS

Gövde Ölçüleri - Overall Dimensions (mm)

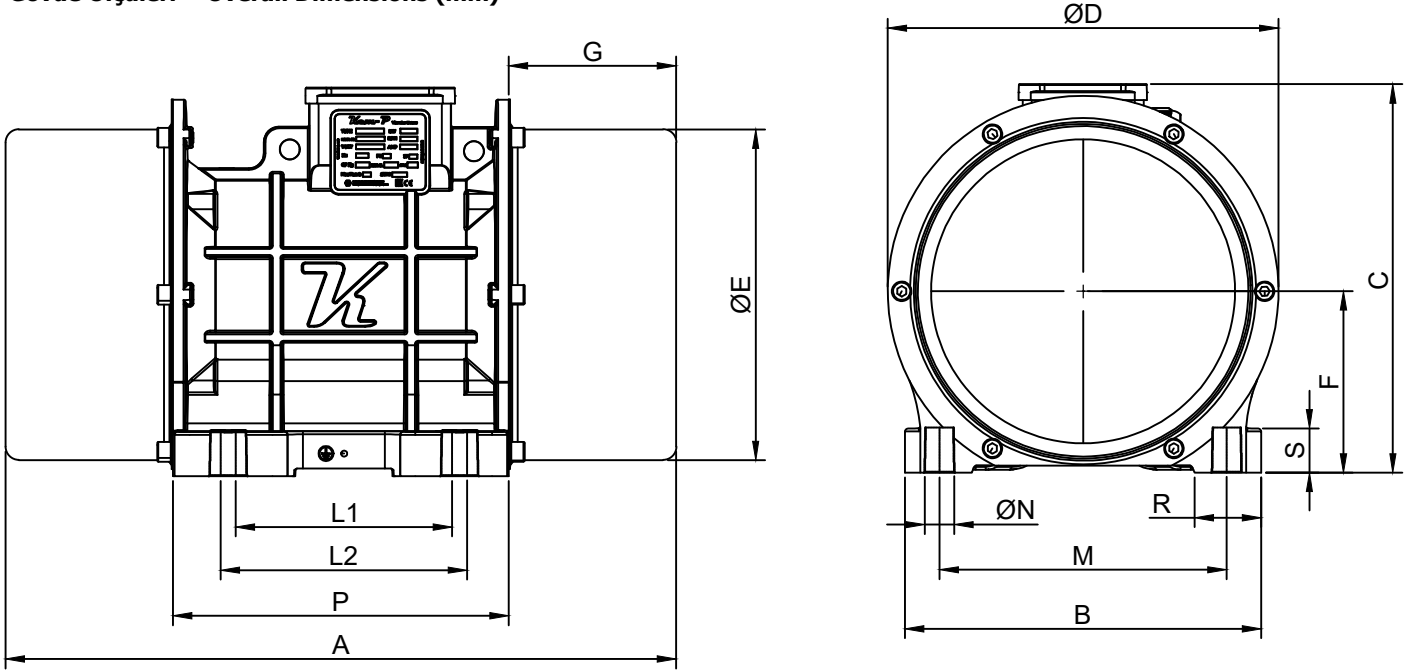

GENEL BOYUTLAR/OVERALL DIMENSIONS (mm)

A	B	C	D	E	F	G	L	Holes Number	M	ØN	P	R	S
528	235.5	257	258.5	219	120	153	140-150	4	190	18.5	222	44	30

TEKNİK VERİLER / TECHNICAL DRAWINGS

Santrifüj Kuvveti Centrifugal Force (Kgf / KN)	(*) Statik Moment Statical Moment (kgmm)	Devir Rpm	Ağırlık Weight (kg)
2393 Kgf/23.47kN	952.4	1500	51.5

(*) Working moment = 2x static moment

Giriş Gücü Input Power (kW)	Giriş Voltajı Input Voltage (V)	Giriş Akımı Input Current (A)	Faz Phase	Verim Efficiency	Başlangıç Akımı Starting Current (A)
1.5	400	2.9	3	0.79	14.2

Montaj deliği Holes number	Çalışma Aralığı Serv.	Koruma Sınıfı Safety Class	Ortam Sıcaklığı Ambient Temperature
4	S1	F	40°C

Sertifikasyon
Certification



II 2D Ext b IIIB T 120° C Db - IP 66

TARİH : 21.04.2026