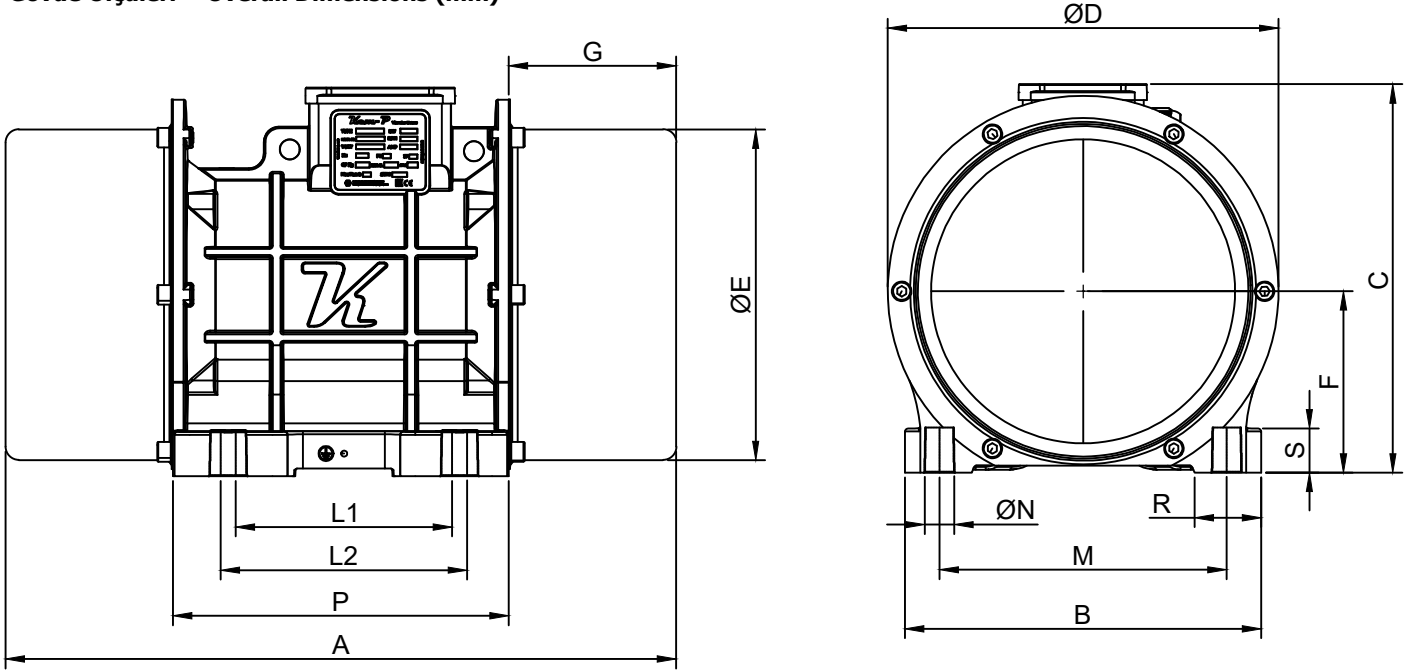


KVM2000/3**2 kutuplu 3000 rpm-50Hz**
2 poles 3000 rpm-50Hz**Kem-P** VIBRATION MOTORS**Gövde Ölçüleri - Overall Dimensions (mm)****GENEL BOYUTLAR/OVERALL DIMENSIONS (mm)**

A	B	C	D	E	F	G	L	Holes Number	M	ØN	P	R	S
444	235.5	257	258.5	219	120	111	140-150	4	190	18.5	222	44	30

TEKNİK VERİLER / TECHNICAL DRAWINGS

Santrifüj Kuvveti Centrifugal Force (Kgf / KN)	(*) Statik Moment Statical Moment (kgmm)	Devir Rpm	Ağırlık Weight (kg)
2105 Kgf/20.64kN	209.44	3000	34

(*) Working moment = 2x static moment

Giriş Gücü Input Power (kW)	Giriş Voltajı Input Voltage (V)	Giriş Akımı Input Current (A)	Faz Phase	Verim Efficiency	Başlangıç Akımı Starting Current (A)
2.2	400	3.5	3	0.9	21.3

Montaj deliği Holes number	Çalışma Aralığı Serv.	Koruma Sınıfı Safety Class	Ortam Sıcaklığı Ambient Temperature
4	S1	F	40°C

Sertifikasyon
Certification

II 2D Ext b IIIB T 120° C Db - IP 66

TARİH : 21.04.2026