


KVM250/15

4 kutuplu 1500 rpm-50Hz
4 poles 1500 rpm-50Hz

Kem-P VIBRATION MOTORS

Gövde Ölçüleri - Overall Dimensions (mm)

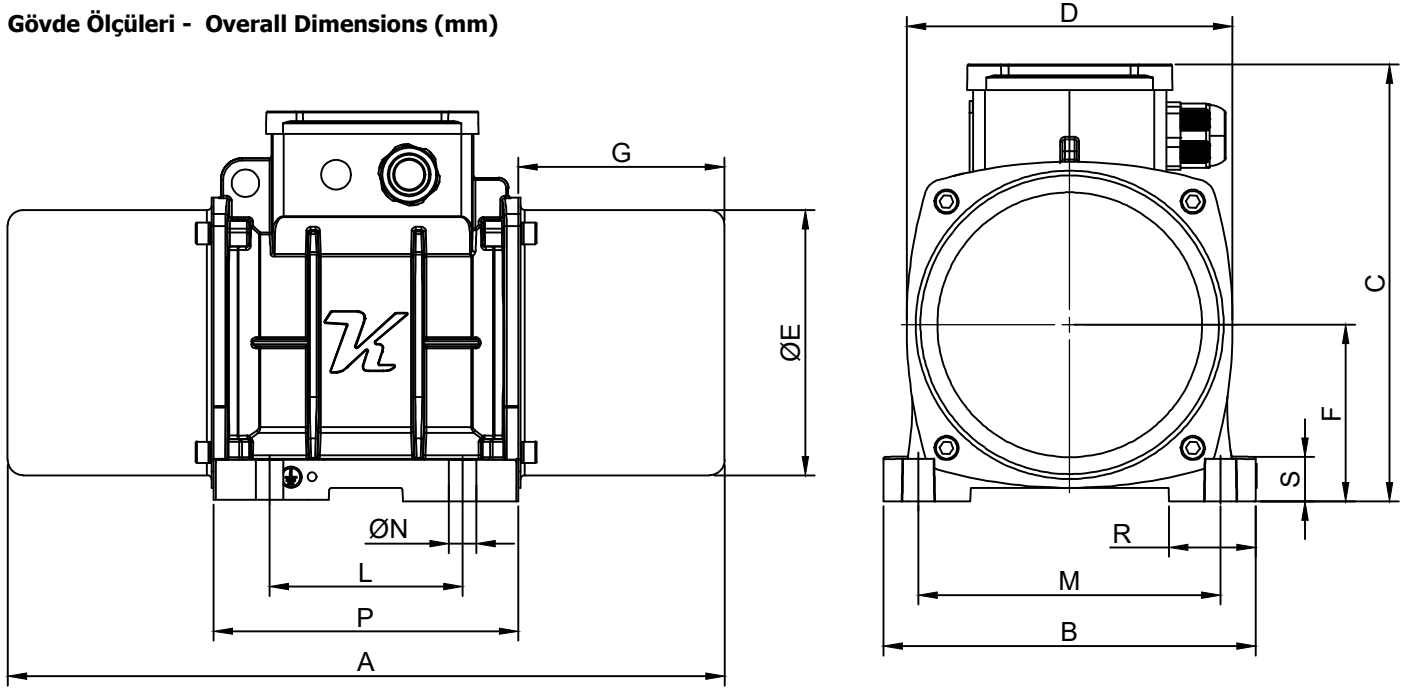

GENEL BOYUTLAR/OVERALL DIMENSIONS (mm)

A	B	C	D	E	F	G	L	Holes Number	M	ØN	P	R	S
291	154	180	135	123	73	74.5	90	4	125	13.5	142	36	18.5

TEKNİK VERİLER / TECHNICAL DRAWINGS

Santrifüj Kuvveti Centrifugal Force (Kgf / KN)	(*) Statik Moment Statical Moment (kgmm)	Devir Rpm	Ağırlık Weight (kg)
242 Kgf/2.37KN	96.31	1500	12

(*) Working moment = 2x static moment

Giriş Gücü Input Power (kW)	Giriş Voltajı Input Voltage (V)	Giriş Akımı Input Current (A)	Faz Phase	Verim Efficiency	Başlangıç Akımı Starting Current (A)
0.18	400	0.45	3	0.61	1.1

Montaj deliği Holes number	Çalışma Aralığı Serv.	Koruma Sınıfı Safety Class	Ortam Sıcaklığı Ambient Temperature
4	S1	F	40°C

Sertifikasyon
Certification



II 2D Ext b IIIB T 120° C Db - IP 66

TARİH : 21.04.2026