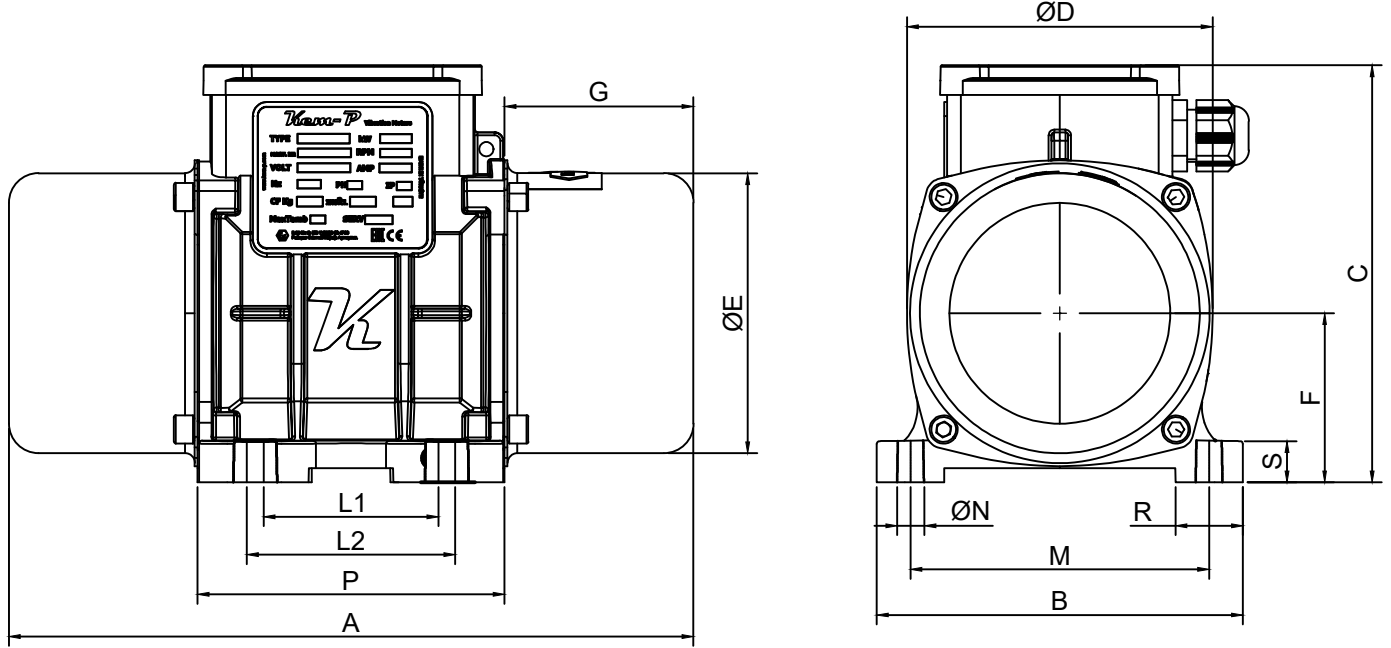


KVM30/15**4 kutuplu 1500 rpm-50Hz**
4 poles 1500 rpm-50Hz**Kem-P** VIBRATION MOTORS**Gövde Ölçüleri - Overall Dimensions (mm)****GENEL BOYUTLAR/OVERALL DIMENSIONS (mm)**

A	B	C	D	E	F	G	L	Holes Number	M	ØN	P	R	S
243	130	148	108.5	99.5	60	67	62-74	4	106	9	109	24	15

TEKNİK VERİLER / TECHNICAL DRAWINGS

Santrifüj Kuvveti Centrifugal Force (Kgf / KN)	(*) Statik Moment Statical Moment (kgmm)	Devir Rpm	Ağırlık Weight (kg)
31 Kgf/0.30kN	12.33	1500	4.7

(*) Working moment = 2x static moment

Giriş Gücü Input Power (kW)	Giriş Voltajı Input Voltage (V)	Giriş Akımı Input Current (A)	Faz Phase	Verim Efficiency	Başlangıç Akımı Starting Current (A)
0.09	400	0.23	3	0.62	0.5

Montaj deliği Holes number	Çalışma Aralığı Serv.	Koruma Sınıfı Safety Class	Ortam Sıcaklığı Ambient Temperature
4	S1	F	40°C

Sertifikasyon
Certification

II 2D Ext b IIIB T 120° C Db - IP 66

TARİH : 21.04.2026