


KVM300/15

4 kutuplu 1500 rpm-50Hz
4 poles 1500 rpm-50Hz

Kem-P VIBRATION MOTORS

Gövde Ölçüleri - Overall Dimensions (mm)

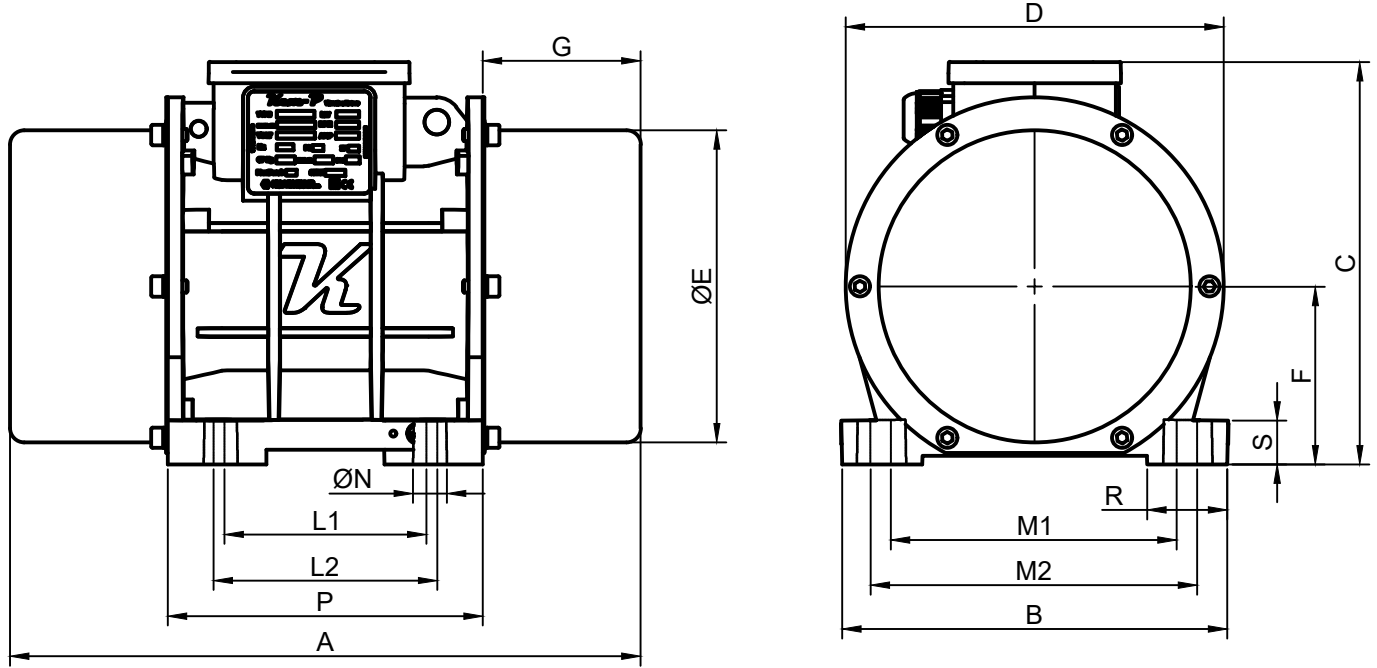

GENEL BOYUTLAR/OVERALL DIMENSIONS (mm)

A	B	C	D	E	F	G	L	Holes Number	M	QN	P	R	S
345	190	198	186	154	87.5	95	100-105	4	140-160	13.5	155	40	21.5

TEKNİK VERİLER / TECHNICAL DRAWINGS

Santrifüj Kuvveti Centrifugal Force (Kgf / KN)	(*) Statik Moment Statical Moment (kgmm)	Devir Rpm	Ağırlık Weight (kg)
319 Kgf/3.12kN	126.96	1500	17.5

(*) Working moment = 2x static moment

Giriş Gücü Input Power (kW)	Giriş Voltajı Input Voltage (V)	Giriş Akımı Input Current (A)	Faz Phase	Verim Efficiency	Başlangıç Akımı Starting Current (A)
0.35	400	0.96	3	0.55	2.6

Montaj deliği Holes number	Çalışma Aralığı Serv.	Koruma Sınıfı Safety Class	Ortam Sıcaklığı Ambient Temperature
4	S1	F	40°C

Sertifikasyon
Certification



II 2D Ext b IIIB T 120° C Db - IP 66

TARİH : 21.04.2026