


KVM3100/15

4 kutuplu 1500 rpm-50Hz
4 poles 1500 rpm-50Hz

Kem-P VIBRATION MOTORS

Gövde Ölçüleri - Overall Dimensions (mm)

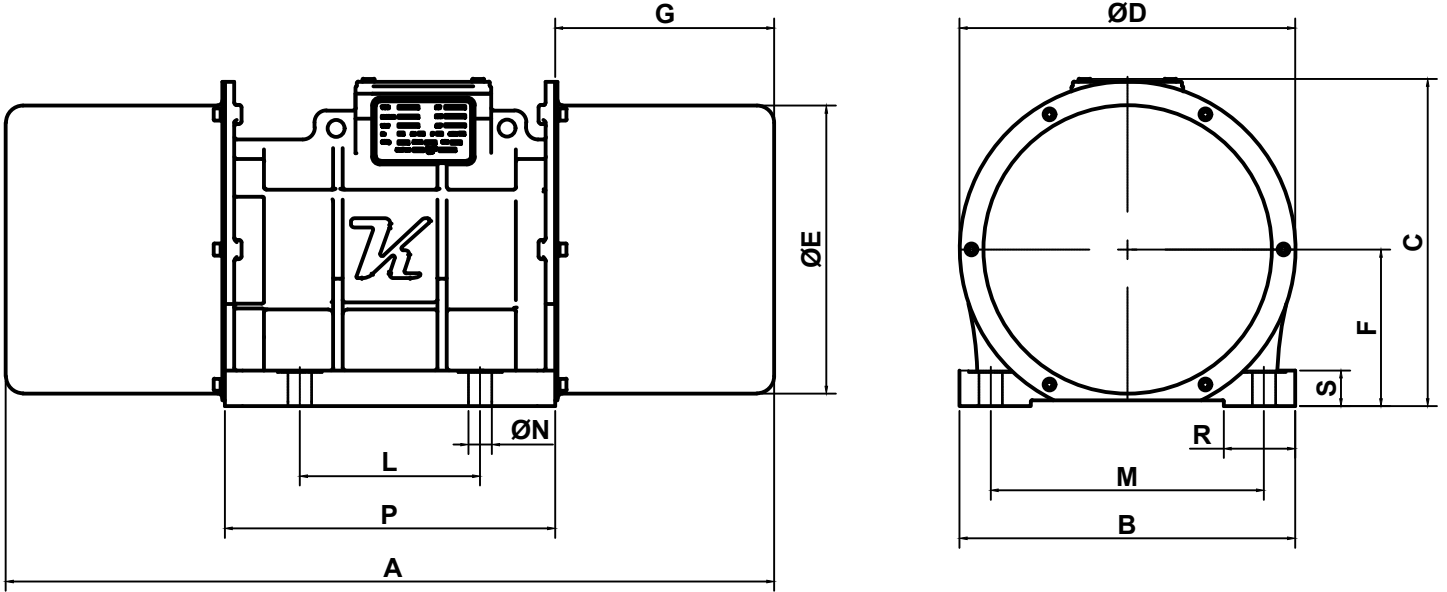

GENEL BOYUTLAR/OVERALL DIMENSIONS (mm)

A	B	C	D	E	F	G	L	Holes Number	M	ØN	P	R	S
575.5	282	275	282	242	131.5	149	155	4	225	22	277.5	60	30

TEKNİK VERİLER / TECHNICAL DRAWINGS

Santrifüj Kuvveti Centrifugal Force (Kgf / KN)	(*) Statik Moment Statical Moment (kgmm)	Devir Rpm	Ağırlık Weight (kg)
3210 Kgf/31.49kN	1277.5	1500	93

(*) Working moment = 2x static moment

Giriş Gücü Input Power (kW)	Giriş Voltajı Input Voltage (V)	Giriş Akımı Input Current (A)	Faz Phase	Verim Efficiency	Başlangıç Akımı Starting Current (A)
2.2	400	3.9	3	0.84	24

Montaj deliği Holes number	Çalışma Aralığı Serv.	Koruma Sınıfı Safety Class	Ortam Sıcaklığı Ambient Temperature
4	S1	120	40

Sertifikasyon
Certification



II 2D Ext b IIIB T 120° C Db - IP 66

TARİH : 21.04.2026