


KVM6500/10

6 kutuplu 1000 rpm-50Hz
6 poles 1000 rpm-50Hz

Kem-P VIBRATION MOTORS

Gövde Ölçüleri - Overall Dimensions (mm)

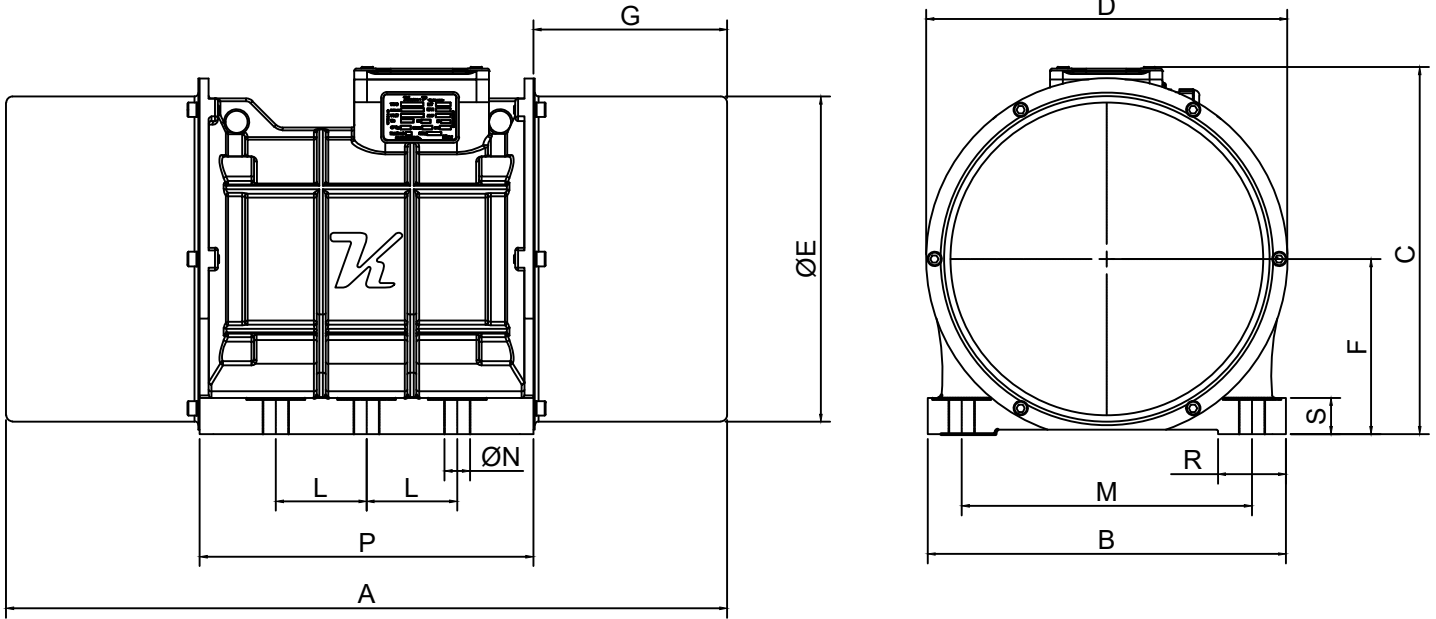

GENEL BOYUTLAR/OVERALL DIMENSIONS (mm)

A	B	C	D	E	F	G	L	Holes Number	M	ØN	P	R	S
799	395	403	398	358.5	193	213.5	100x2	6	320	28	372	75	40

TEKNİK VERİLER / TECHNICAL DRAWINGS

Santrifüj Kuvveti Centrifugal Force (Kgf / KN)	(*) Statik Moment Statical Moment (kgmm)	Devir Rpm	Ağırlık Weight (kg)
6720 Kgf/65.92kN	6018.8	1000	330

(*) Working moment = 2x static moment

Giriş Gücü Input Power (kW)	Giriş Voltajı Input Voltage (V)	Giriş Akımı Input Current (A)	Faz Phase	Verim Efficiency	Başlangıç Akımı Starting Current (A)
4.25	400	7.6	3	0.80	47

Montaj deliği Holes number	Çalışma Aralığı Serv.	Koruma Sınıfı Safety Class	Ortam Sıcaklığı Ambient Temperature
6	S1	120	40

Sertifikasyon
Certification



II 2D Ext b IIIB T 120° C Db - IP 66

TARİH : 21.04.2026