


# KVM700/7,5

8 kutuplu 750 rpm-50Hz  
8 poles 750 rpm-50Hz

**Kem-P** VIBRATION MOTORS

## Gövde Ölçüleri - Overall Dimensions (mm)

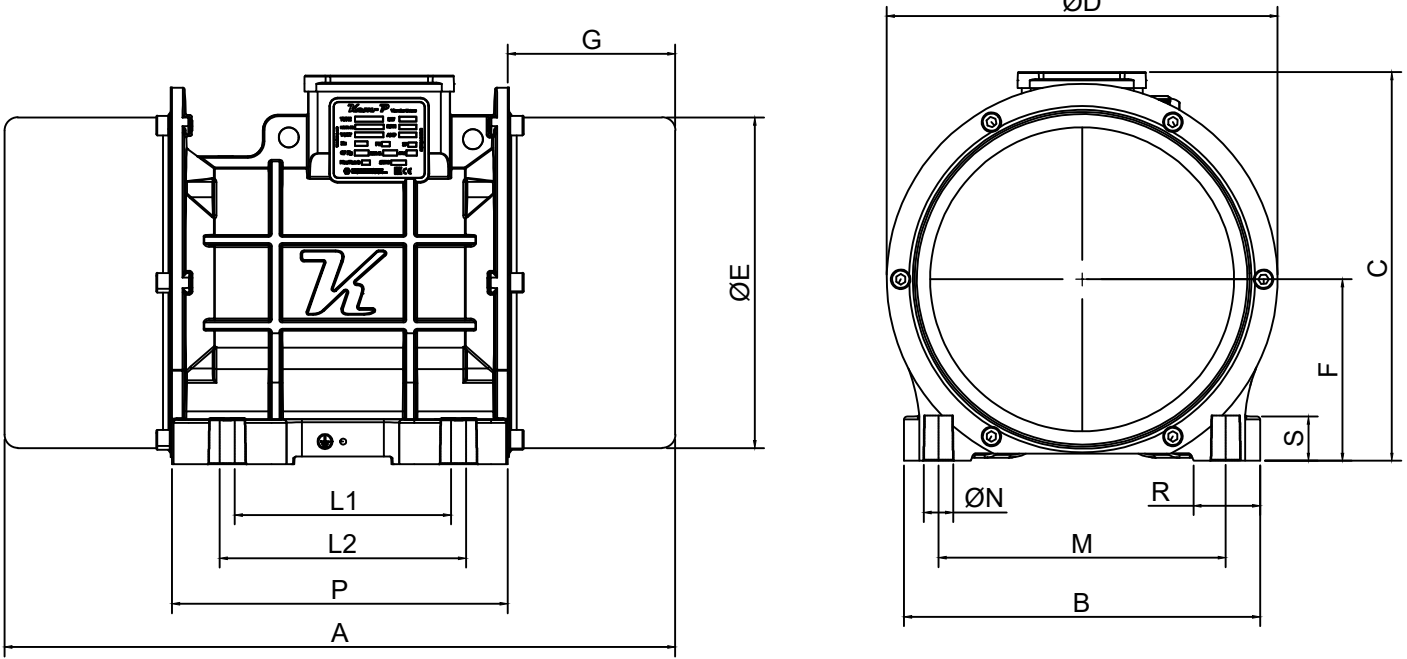

### GENEL BOYUTLAR/OVERALL DIMENSIONS (mm)

| A   | B     | C   | D     | E   | F   | G   | L       | Holes Number | M   | ØN   | P   | R  | S  |
|-----|-------|-----|-------|-----|-----|-----|---------|--------------|-----|------|-----|----|----|
| 528 | 235.5 | 257 | 258.5 | 219 | 120 | 153 | 140-150 | 4            | 190 | 18.5 | 222 | 44 | 30 |

### TEKNİK VERİLER / TECHNICAL DRAWINGS

| Santrifüj Kuvveti<br>Centrifugal Force<br>(Kgf / KN) | (*) Statik Moment<br>Statical Moment<br>(kgmm) | Devir<br>Rpm | Ağırlık<br>Weight<br>(kg) |
|------------------------------------------------------|------------------------------------------------|--------------|---------------------------|
| 552 Kgf/5.41kN                                       | 878.9                                          | 750          | 54                        |

(\*) Working moment = 2x static moment

| Giriş Gücü<br>Input Power<br>(kW) | Giriş Voltajı<br>Input Voltage<br>(V) | Giriş Akımı<br>Input Current<br>(A) | Faz<br>Phase | Verim<br>Efficiency | Başlangıç Akımı<br>Starting Current<br>(A) |
|-----------------------------------|---------------------------------------|-------------------------------------|--------------|---------------------|--------------------------------------------|
| 0.45                              | 400                                   | 1.3                                 | 3            | 0.55                | 3.25                                       |

| Montaj deliği<br>Holes number | Çalışma Aralığı<br>Serv. | Koruma Sınıfı<br>Safety Class | Ortam Sıcaklığı<br>Ambient Temperature |
|-------------------------------|--------------------------|-------------------------------|----------------------------------------|
| 4                             | S1                       | F                             | 40°C                                   |

Sertifikasyon  
Certification



II 2D Ext b III B T 120° C Db - IP 66

TARİH : 21.04.2026